



# 03BCK

03BCK

AW

TO


25

封装形式		03BCK				
中心波长 (nm)		520		638	650	
光学	$P_{op}$ (mW) <sup>(1)</sup>	2~10	60	150	130	2~10
	(nm)	±10				
	FWHM nm	<6				
	/ T nm/	0.3				
电学	$I_{th}$ mA	~50	170	75	80	~43
	$I_{op}$ mA	~75	300	280	260	~55
	$V_{op}$ V	6	6.2	3	2.4	2.2
	$\eta_{es}$ W/A	0.4	0.4	0.81	0.72	0.8
光纤	m	4/125,6/125,9/125			105/125	
	NA	0.14			0.22	
	L cm	100±10				
		FC/PC ST SMA905				


1

参数	工作温度 (°C)	工作相对湿度 (%)	存储温度 (°C)	存储相对湿度 (%)	引脚焊接温度 (max/°C)
最小	10	-	-20	-	-
最大	30	75	70	90	250(10Sec.)

封装形式	波长 (nm)	功率 (mW)	型号
03BCK	520	2~10	R520±10-10mWF-03BCK
	520	60	R520±10-60mWF-03BCK
	638	150	R638±10-150mWF-03BCK
	650	2~10	R650±10-10mWF-03BCK
	650	130	R650±10-130mWF-03BCK

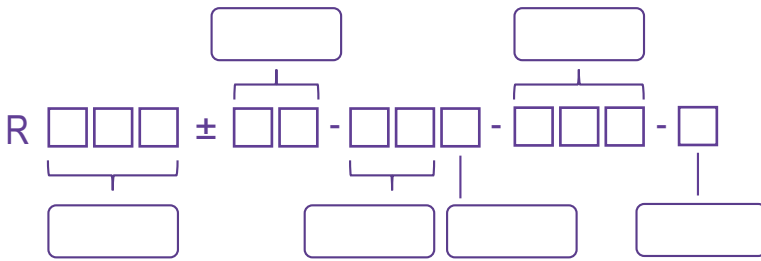

mm

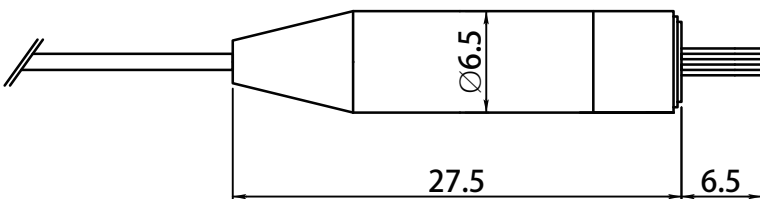

引脚	功能
1	
2	

